


CITIZEN

Miyano

BNJ42/51

Fixed Headstock Type CNC Automatic Lathe




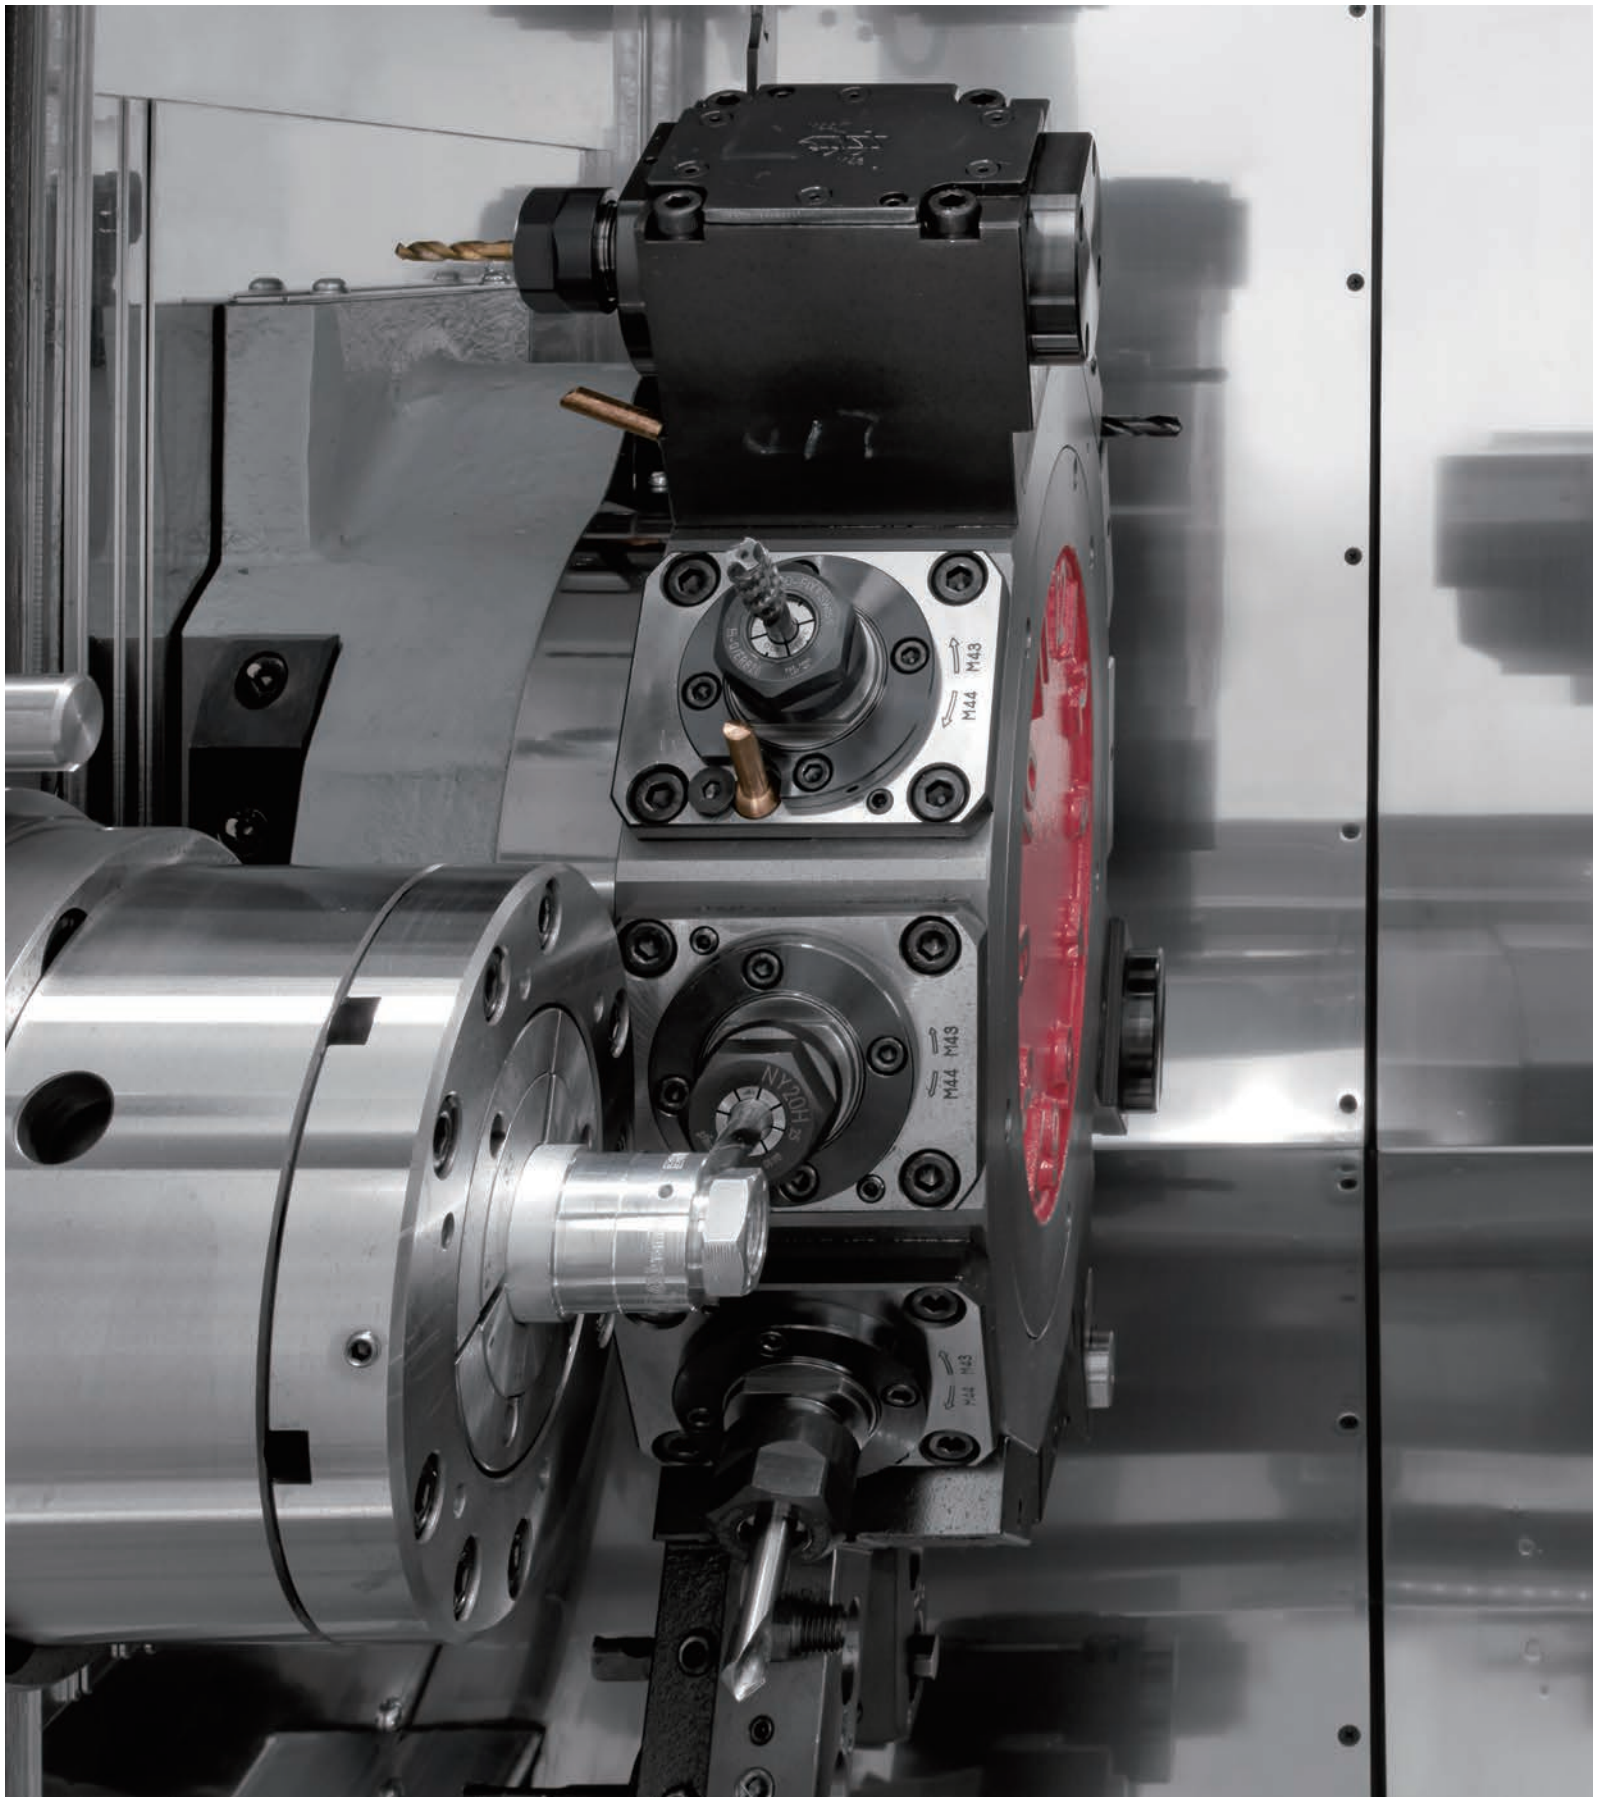

An evolution of the popular BNJ platform now with an upgraded turret on spindle 2 - offering 8 positions with driven tools.

Milling operations can now be done on the subspindle enabling substantial reductions in cycle time.



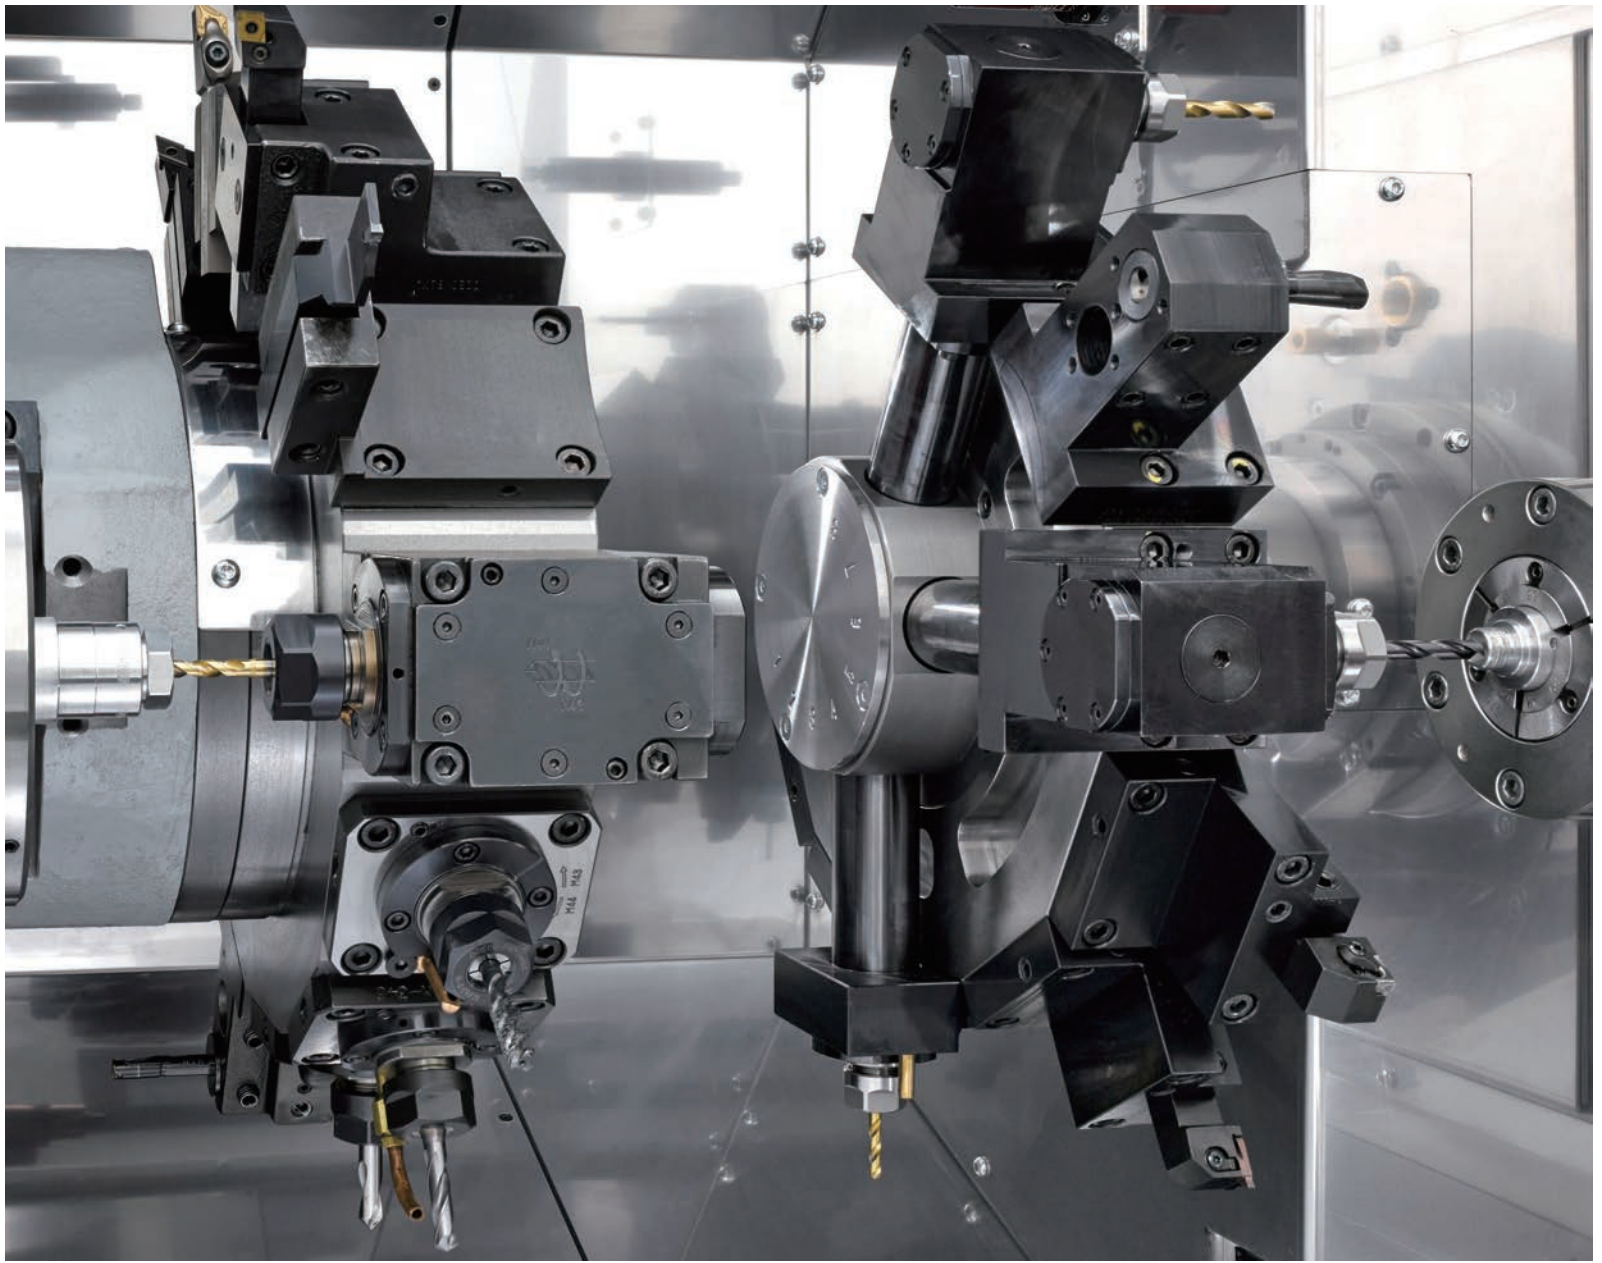

Turret No. 1 accommodating higher-torque revolving tools


Since a single drive mechanism is used to drive the revolving tools, they can be mounted at all stations. With a maximum torque of 25 Nm, they can handle heavy-duty cutting too.

Turret No. 2 accommodating revolving tools(option) and with a bigger tool capacity

The number of tool mounting positions has increased from the six on existing machines to eight. The turret also now accepts double plain holders, greatly increasing the number of tools that can be mounted.

Machining time shortened by simultaneous machining at left and right

Cycle times are improved due to vastly increased capability of turret on spindle 2 enabling independent, simultaneous power tool operations on both spindles.

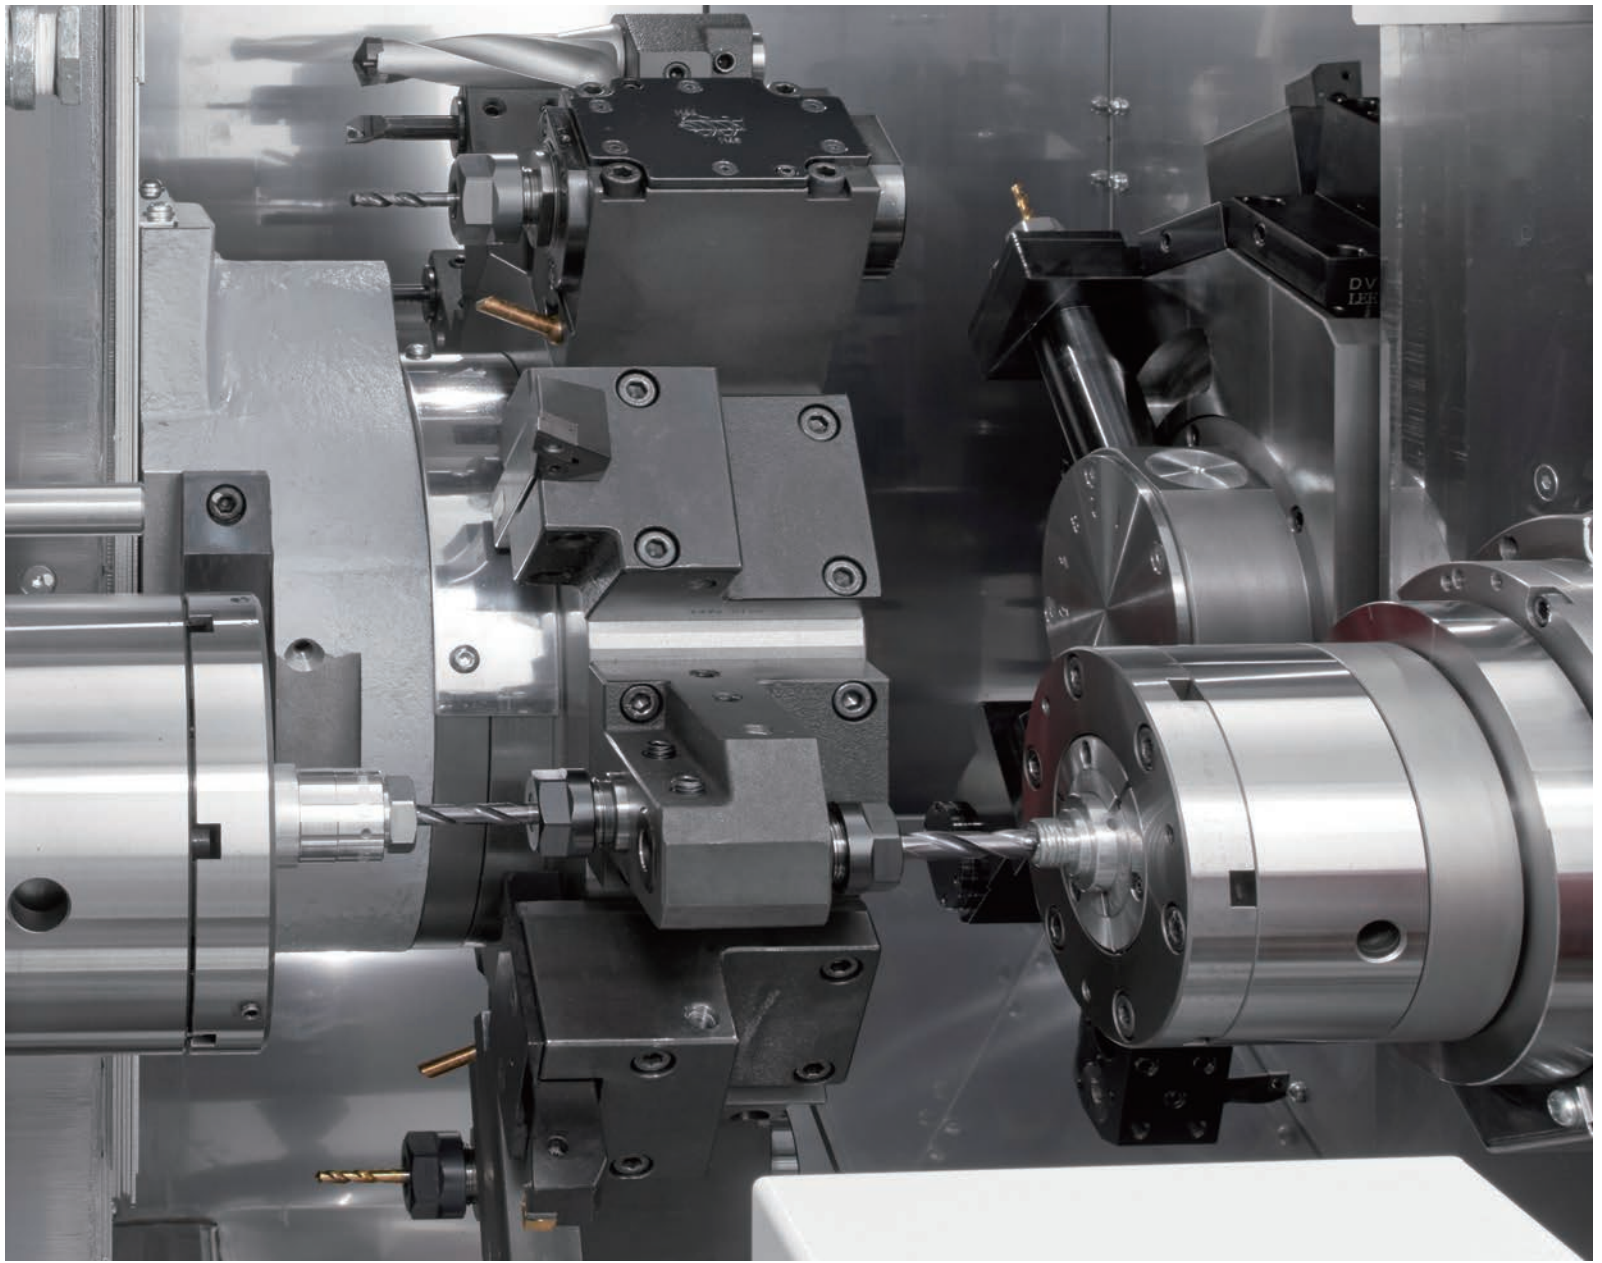

Combined machining with the Y-axis

The SY type can handle the machining of complex shapes using the main turret's Y axis function.

Machining time shortened through superimposition machining

Superimposition control, where the move commands of turret No. 2 that can move in the X and Z directions are overlapped on the movement of turret No. 1, can achieve substantial reductions in machining time.

Basic construction

Turret No. 1

Type of the turret No.: 12 St.


Number of revolving tools mountable: 12 (25 Nm)

Turret No. 2

Type of the turret : 8 St.

Number of revolving tools mountable: 4 (10 Nm)

Y axis (SY type only)

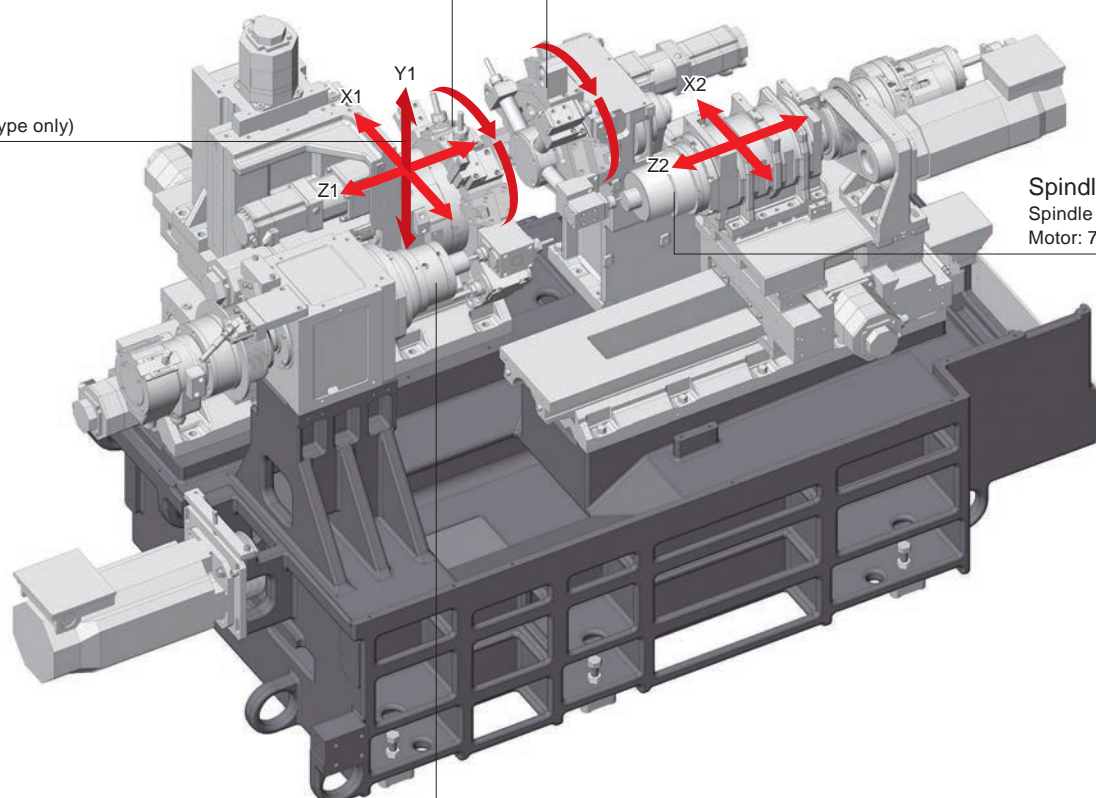

Spindle No. 2

Spindle speed: 5000 min⁻¹

Motor: 7.5/5.5 KW

Spindle No. 1

Spindle speed: 6000 min⁻¹ (BNJ42) / 5000 min⁻¹ (BNJ51)

Motor: 15/11 kW

Considerably improved operability


The operation panel that was at the top of the previous machines has been moved to the left side of the machine. Operating convenience has been improved by lowering

the position of the operation switches. The generous door opening also improves access to the machining area, lightening the load on the operator.

Previous machine tooling area



BNJ42/ BNJ51 tooling area

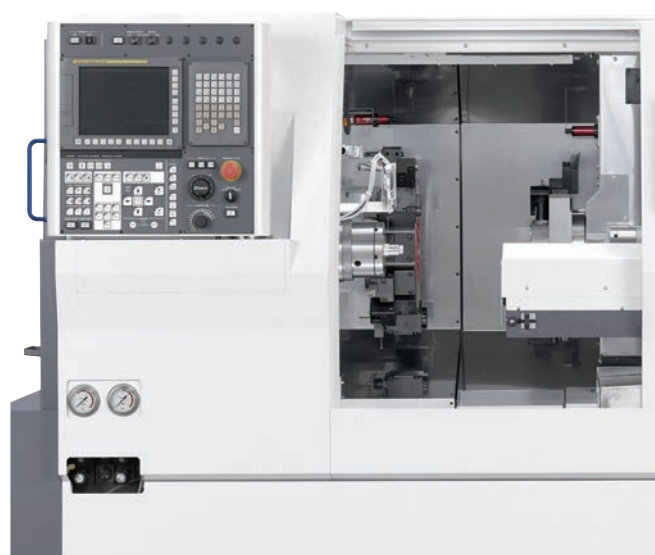


High-rigidity spindle and higher-torque revolving tools

Both the main spindles of the BNJ-42 adopted angular contact ball bearings at the front and double-row cylindrical roller bearings at the rear, while the BNJ-51 further increased the rigidity of spindle 1 by adopting the combination of angular contact ball bearings and double-row cylindrical roller bearings at the front and double-row cylindrical roller bearings at the rear.


Assembling and inspecting these spindles based on a strict management system gives them ample rigidity and suppression of abnormal heat output, and manageable thermal displacement characteristics, facilitating high-precision machining.

In addition, the use of rigid 25 Nm revolving tools on turret No. 1 realizes stable milling.

Revolving Tool Torque Diagram
Turret No.1

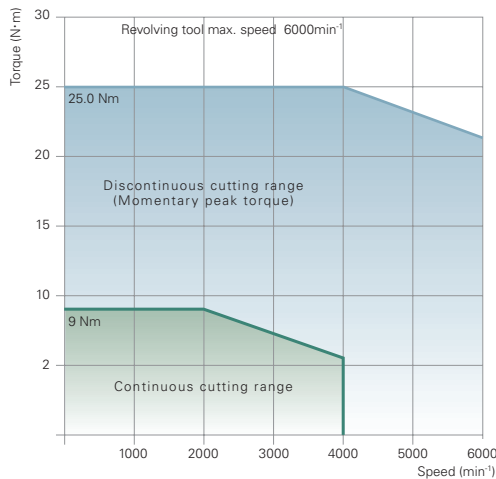


Revolving Tool Torque Diagram
Turret No.2

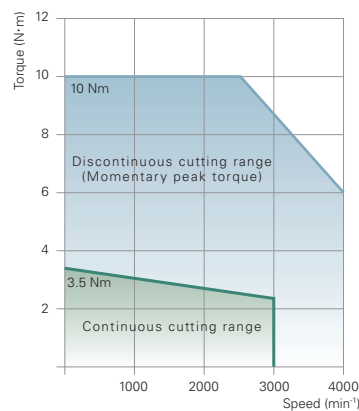


Machining accuracy


Test piece
Material : BSBM (Brass)
Spindle speed : 3,000 min⁻¹
Feed : 0.06 mm/rev
Depth of cut : 0.5 mm (in diameter), 0.25 mm (in radius)

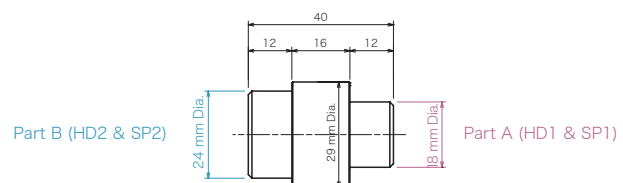


Roundness (part A)
0.66μm




Surface roughness (part A)
Rz 2.5468μm

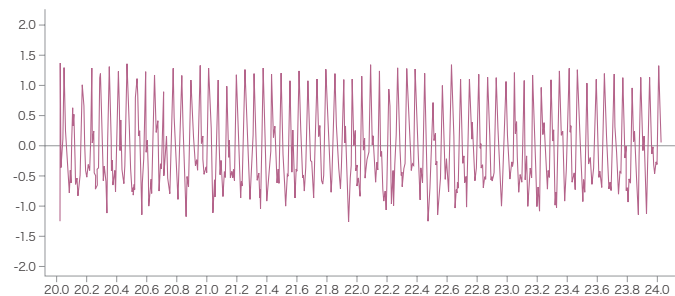

Roundness (part B)
0.62μm



Surface roughness (part A)
Rz 2.3419μm

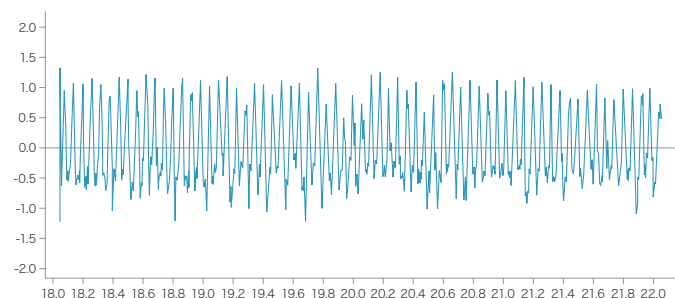


^ This data does not guaranty accuracy.


Tooling area

BNJ42S


Spindle No.2 with Revolving tool

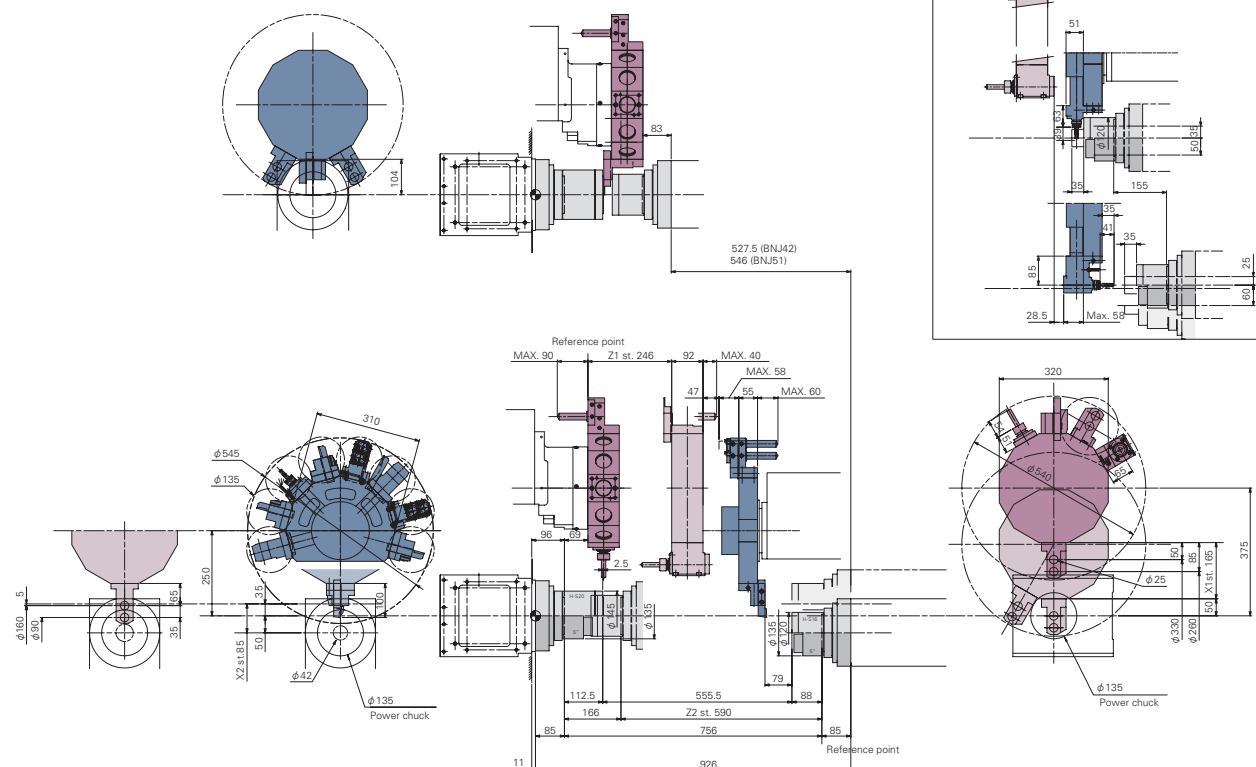


BNJ42SY

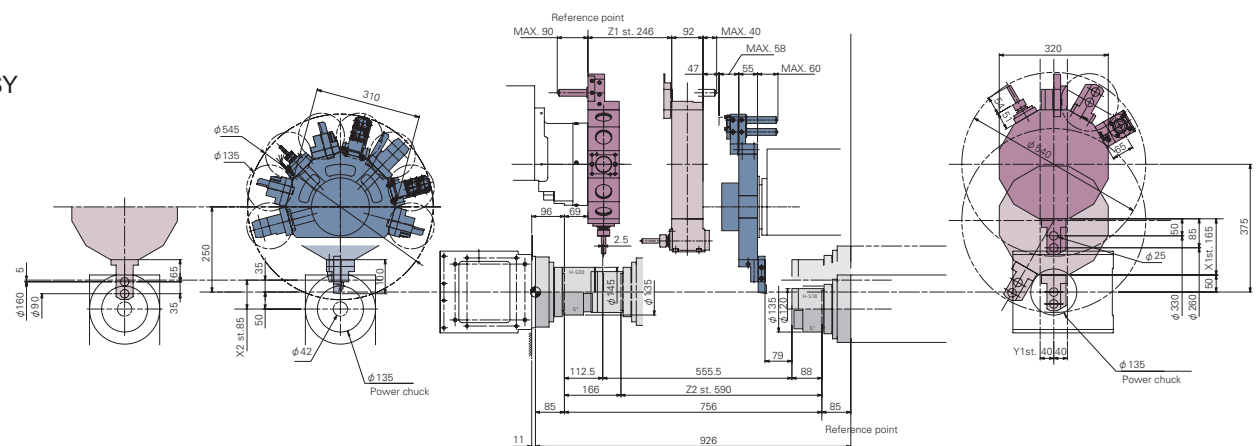

BNJ51SY

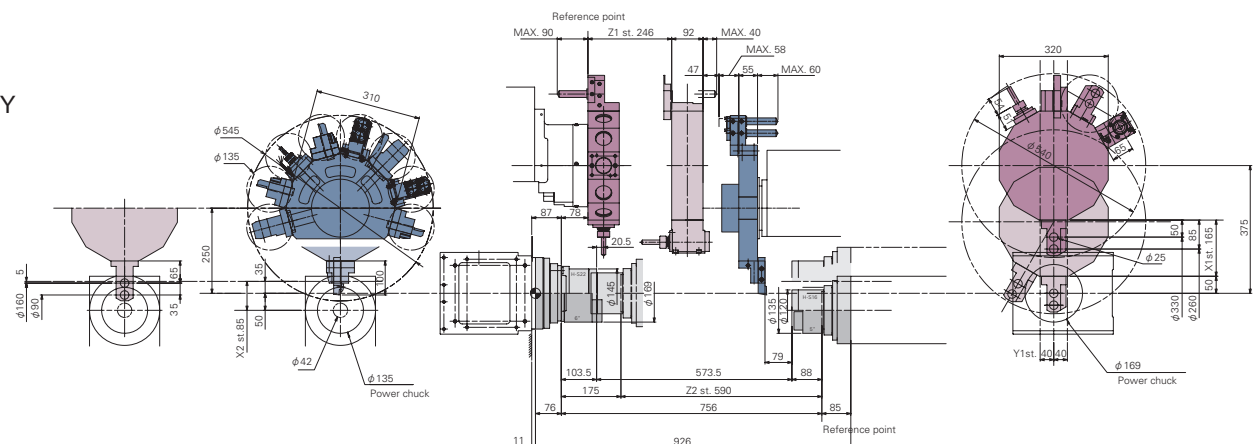

Tooling system

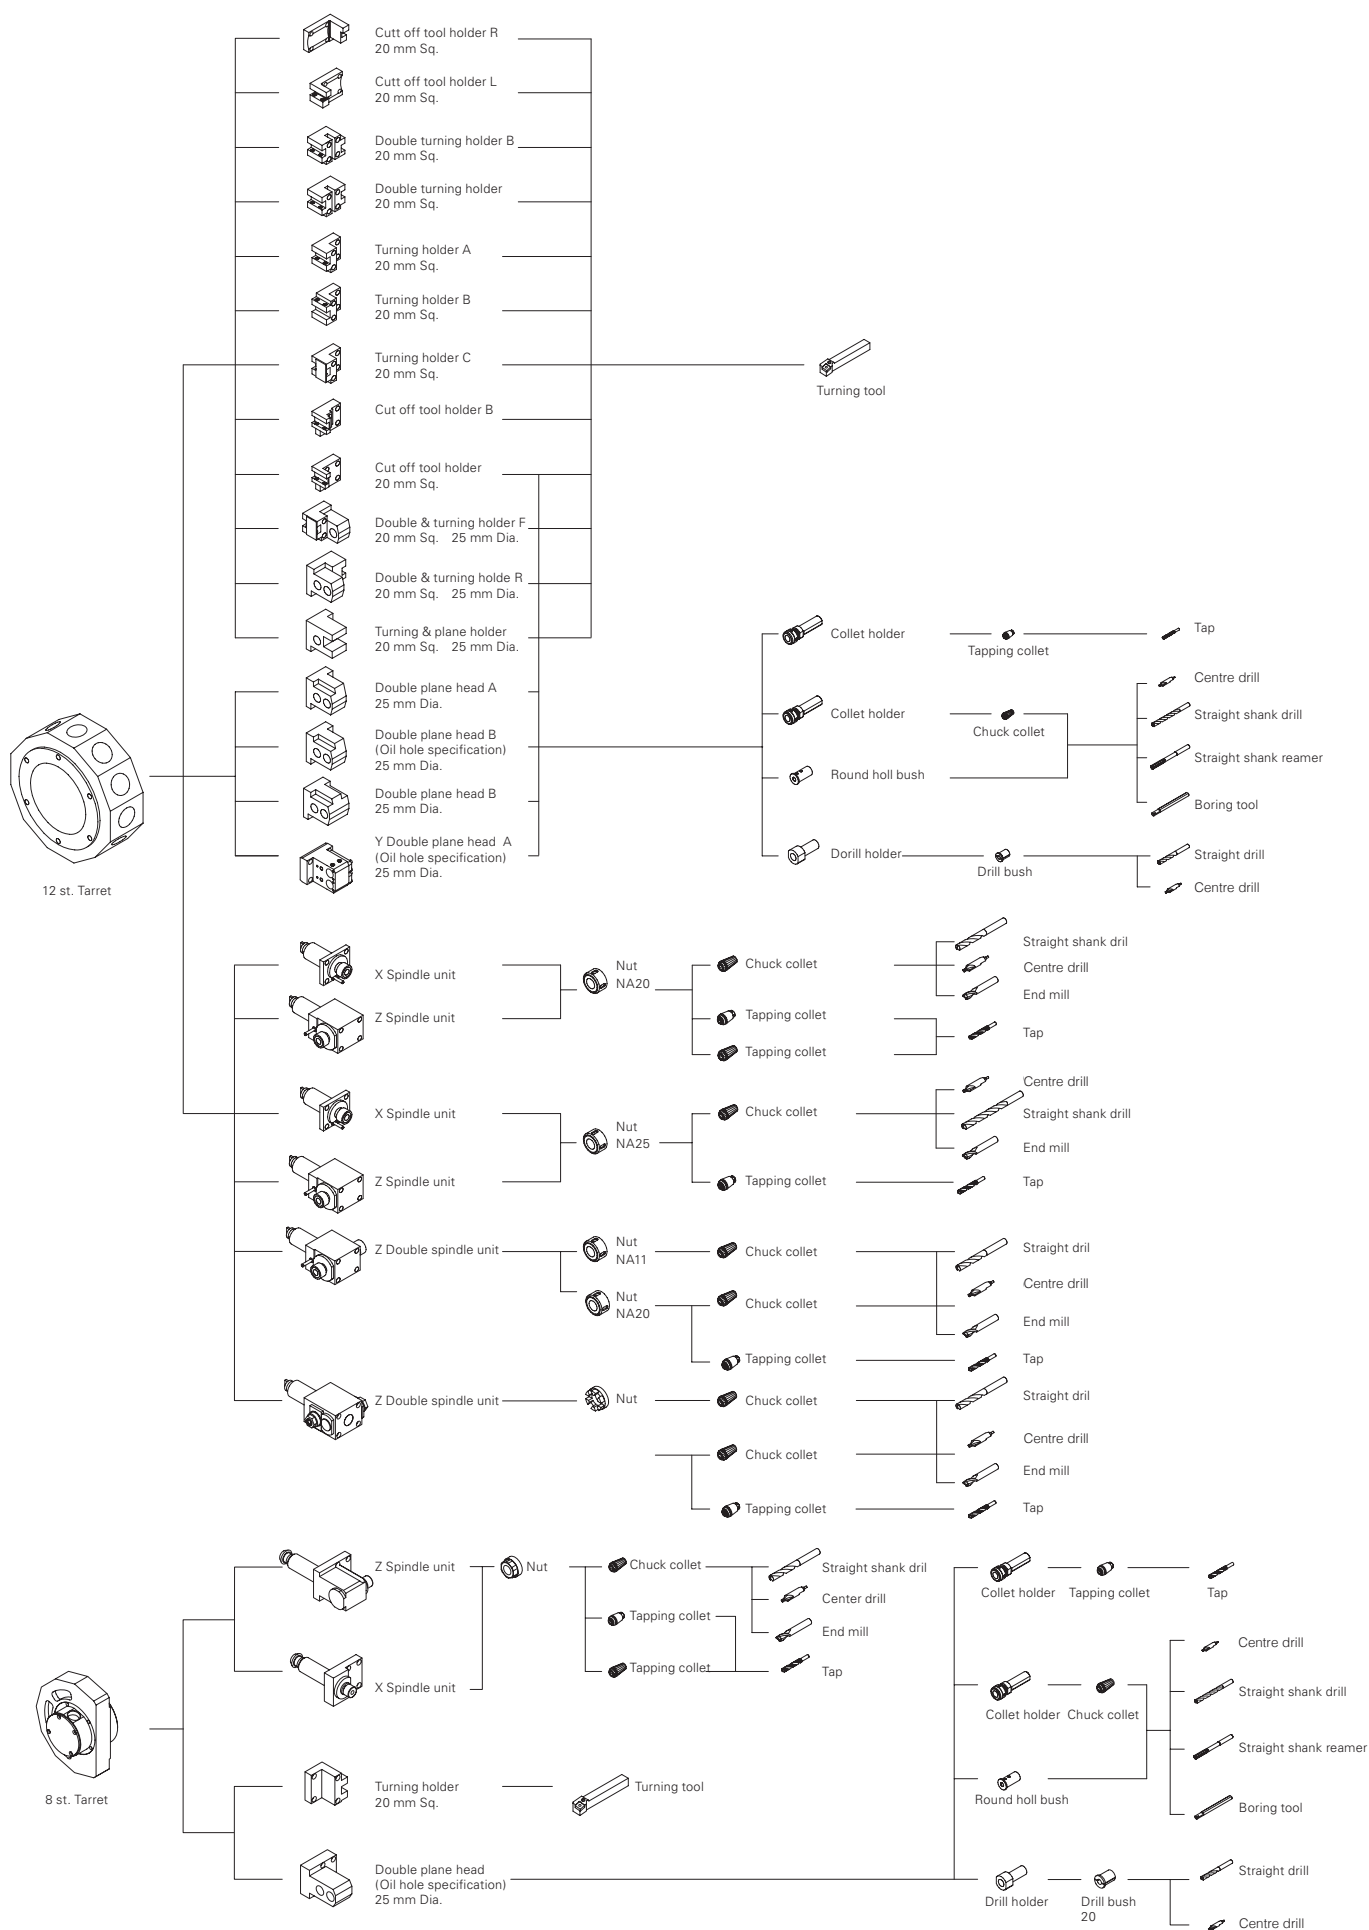

NC custom menu

Machining support screens are provided to improve working efficiency.

CUSTOM MENU			
NO.		NO.	
1	BLOCK SKIP	9	AUTO MONITOR
2	MACHINING DATA	10	START CONDITION
3	TOOL SETTING	11	SPINDLE & RUT
4	TOOL COUNTER	12	POWER MONITOR
5	CYCLE TIME	13	MAGNETIC SWITCH
6		14	MAINTENANCE
7	COUNTER	15	
8		16	TRANSFERENCE DET
BNJ-51SY6 DV5Y0002 DVES0001 (150423)			

Menu screen

Displays the list of custom screens.

HD1 MACHINING DATA			
PROGRAM NO.		550	
CHUCK1 - CHUCK2 DISTANCE		400.000	
CUT-OFF POSITION		5.000	
WORK-PIECE LENGTH		50.000	
CHUCK2 POSITION		20.000	
TOOL OFFSET GEOMETRY R&W 1:ENABLE		0	
ORIGIN SELECT FUNC 1:EFFECTIVE		0	
AFTER SELECTING TO VALID / INVALID, WILL REMEASURE THE TOOL OFFSET			

Machining data

Entering the machining length and position of the cut-off here makes it easier to measure geometry offsets and to mount tools.

HD1 TOOL COUNTER				
NO.	CURRENT	PRESET	X-WEAR	Z-WEAR
001	309	800	0.000	0.000
002	12	1000	0.000	0.000
003	0	0	0.000	0.000
004	500	500	0.000	0.000
005	0	0	0.000	0.000
006	0	0	0.000	0.000
007	0	0	0.000	0.000
008	237	2000	0.000	0.000
009	0	0	0.000	0.000
010	0	0	0.000	0.000

Tool counters

Used to set and reset the tool counter stop value and enter the tool wear offsets.

HD1 工具セッティング (形状)					
NO.	X1	Z1	R	T	Y1
001	-223.020	98.626	0.000	0	0.000
002	-211.803	4.500	0.000	0	0.000
003	-260.000	81.291	0.000	0	0.000
004	-222.519	4.500	0.000	0	0.000
005	-200.415	4.500	0.000	0	0.000
機械座標					
X1	-0.004	X2	-0.003		
Z1	138.551	Z2	-0.002		
Y1	-0.228				
DRG SELECT					

Tool setting

Used to measure geometry offsets. It can also be used for tool mounting support, to ensure that the overhang of all tools is fixed at a constant value.

HD1 CYCLE TIME			
	Cutting	NotCutting	Operating
	225.392	122.704	348.096
1	0.000	18.896	18.896
2	0.000	0.000	0.000
3	0.000	0.000	0.000
4	0.000	0.000	0.000
5	0.000	0.000	0.000
6	0.000	0.000	0.000
7	0.000	0.000	0.000

Cycle time display

Automatically measures the proportion of cutting and non cutting time per cycle.


T-MONITOR MONITORING No.06			
%	25	50	75 100 125 150 PEAK
X	*****	*	102
Z	*		0
Y			
ZS			
C			
A			
S1	*****	*	98
S2			

Tool monitor


Allows the user to set limit values for load on individual tools. This can help to prevent damage to tools by automatically stopping the machine if the tool load increases.

Thermo revision


This is a thermal displacement correction system that measures the temperature of each part of the machine with sensors installed inside it, and corrects the thermal displacements on the X-axis and Z-axis by inputting coefficients prepared for oil-based and water soluble coolants.



Continuous cutting of brass No revolving tool operation (Thermorevision compensation ON)

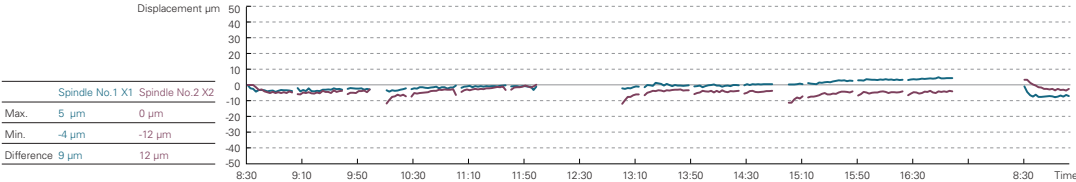

Continuous cutting of brass No revolving tool operation (Thermorevision compensation ON) Duty13%

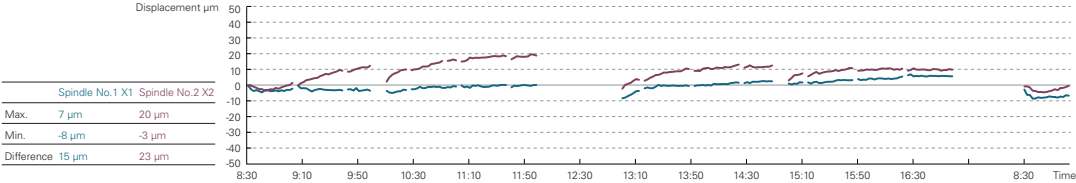


^ This function cannot guaranty accuracy.


Collision buffering

When interference is encountered in rapid traverse operation, the function decelerates and stops axis feed and generates retraction torque to retract the feed axis in the opposite direction to the collision direction, limiting damage to the machine.

Without the collision buffering function

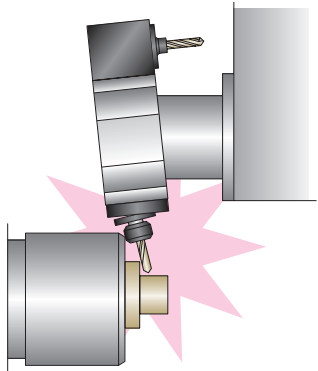

With the collision buffering function

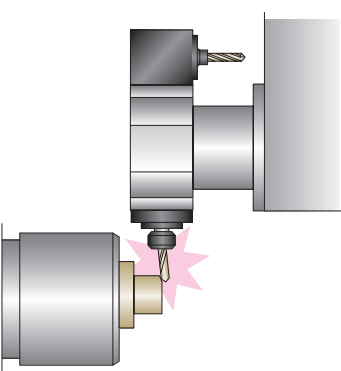

* This function does not serve to prevent collisions.
* It is only enabled for rapid traverse commands, and is disabled in cutting feed, etc.

Options




Part catcher

This optional device is indispensable for bar work.



Part conveyor

This optional device is indispensable for bar work.

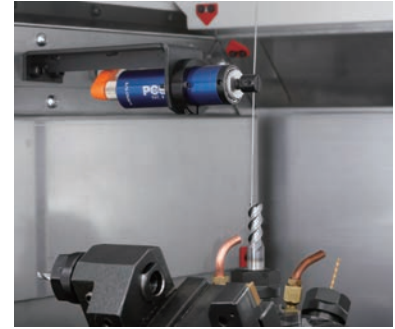

Drill breakage detector

Drill breakage is detected by the swing cylinder. The machine stops when breakage is detected, and a second accident can be prevented.



Bar loader


Indispensable unit for protracted unmanned bar work operation.




Chip conveyor

Ejects chips smoothly. This optional unit is indispensable for protracted unmanned operation.

External view

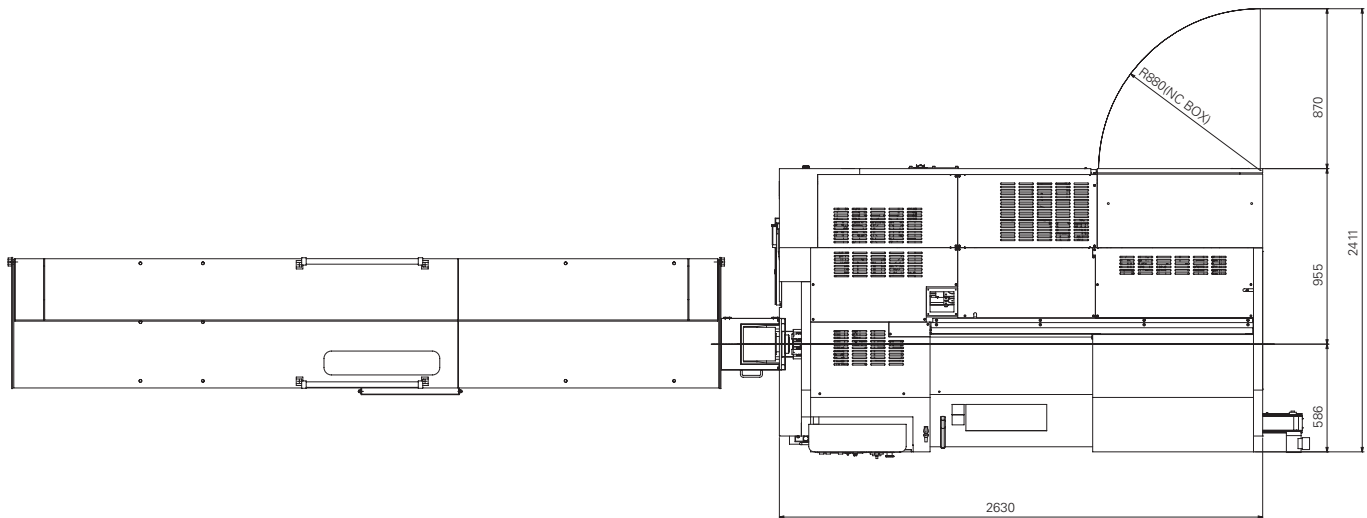

ASR X-45/51PN2 (2.5m 6327/ 3.0m 6827/ 4.0m 7827)
ASR FX-45 (3.0m 6545/ 4.0m 7405)

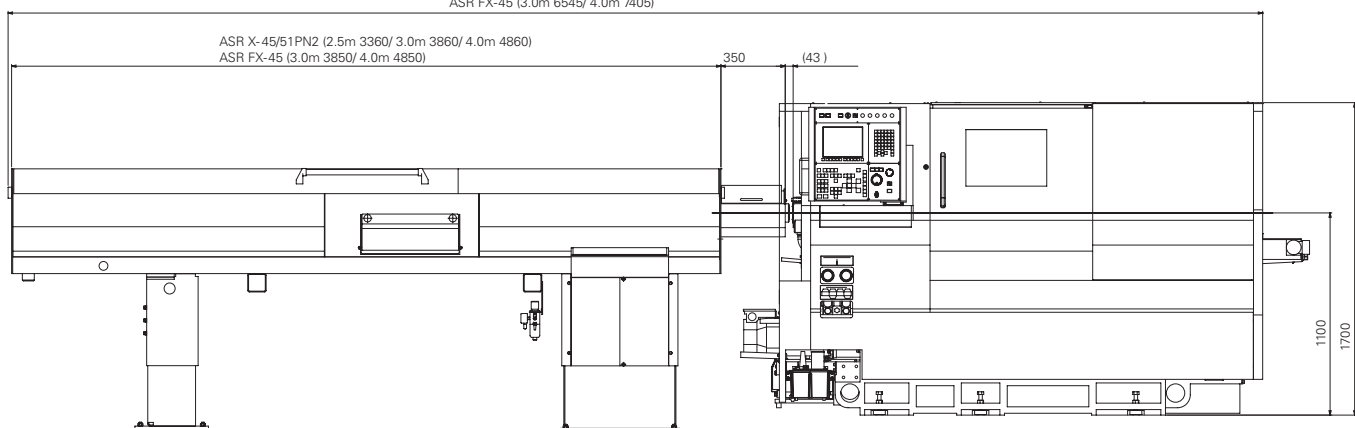

Machine specification

		BNJ-42S6	BNJ-42SY6	BNJ-51SY6
Machining capacity				
Maximum machining length		100 mm		
Diameter of standard cutting	Spindle No. 1	42 mm Dia.		51 mm Dia.
	Spindle No. 2	42 mm Dia.		
Chuck size	Spindle No. 1	5 inch		6 inch
	Spindle No. 2	5 inch		
Spindle				
Number of spindle		2		
Spindle speed range	Spindle No. 1	6,000 min ⁻¹		5,000 min ⁻¹
	Spindle No. 2	5,000 min ⁻¹		
Inner diameter of draw tube	Spindle No. 1	52 mm Dia.		
	Spindle No. 2	43 mm Dia.		
Collet chuck	Spindle No. 1	H-S22, DIN177E		
	Spindle No. 2	JPN, H-S16, DIN171E		
Power chuck	Spindle No. 1	5" thru-hole chuck		6" thru-hole chuck
	Spindle No. 2	5" thru-hole chuck		
Turret				
Number of turret		2		
Type of turret	Turret No. 1	12 station turret		
	Turret No. 2	8 station turret		
Shank height of square turning tool		20 mm Sq.		
Diameter of drill shank		25 mm Dia.		
Revolving tools				
Number of revolving tool	Turret No. 1	Max. 12		
	Turret No. 2	Max. 4		
Type of revolving tool	Turret No. 1	Single clutch		
	Turret No. 2	Simultaneous drive in all positions		
Tool spindle speed range	Turret No. 1	6,000 min ⁻¹		
	Turret No. 2	3,000 min ⁻¹		
Machining capacity	Drill	Turret No. 1	Max. 13 mm Dia.	
		Turret No. 2	Max. 10 mm Dia.	
	Tap	Turret No. 1	Max. M12×1.75 (S45C-D)	
		Turret No. 2	Max. M6×1.0 (S45C-D)	
Slide stroke				
Turret slide stroke	X1 axis	165 mm		
	Z1 axis	246 mm		
	Y1 axis	---	80 (±40) mm	
Spindle slide stroke	X2 axis	85 mm		
	Z2 axis	590 mm		
Feed rate				
Rapid feed rate	X1 axis	20 m/ min		
	Z1 axis	20 m/ min		
	Y1 axis	---	12 m/ min	
	X2 axis	20 m/ min		
	Z2 axis	20 m/ min		
Motors				
Spindle drive	Spindle No. 1 Cs	15/ 11 kw (15 min/ cont.)		
	Spindle No. 2 Cs	7.5/ 5.5 (15 min/ cont.)		
Revolving tool drive	Turret No. 1	2.2 kw		
	Turret No. 2	0.75 kw		
Slide		1.2 kw (X1, Z1, Y, X2, Z2)		
Hydraulic oil motor		2.2 kw		
Lubricating oil motor		0.004 kw		
Coolant pump		0.25 kw×1, 0.18 kw×1		
Turret index motor		0.75 kw		
Power supply				
Voltage		AC 200/ 220±10% 50/ 60 Hz±1%		
Capacity		33 KVA		
Air supply		0.5 MPa		
Fuse		100 A		
Tank capacity				
Hydraulic oil tank capacity		10 L		
Lubricating oil tank capacity		4 L		
Coolant tank capacity		300 L		
Machine dimensions				
Machine height		1,700 mm		
Floor space		2,840×1,560 mm (without Chip conveyor)		
Machine weight		5,300 kg		
Others				
Splash guard interlock, coolant, pneumatic unit, machine light, non-fuse breaker,				
SP2 Work ejector & inner high pressure coolant, chuck close confirmation,				
Total & preset counter (custom menu)				
Optional accessories				
Cut-off confirmation, high pressure coolant, revolving tool (HD2), spindle brake, drill breakage detector,				
air blow, part carrier, parts catcher & parts conveyor, chip conveyor, chip box, coolant level switch,				
bar feeder interface, coolant mist collector & blast-proof damper, signal tower, automatic power shut-off,				
automatic fire extinguishing equipment, thermo revision, tool holder, tools, etc.				

NC specification

Device	FS 0i-TF
Controlled axis	Simultaneously controlled axis Max.4
	X1, Z1, Y1, Cs1, A1, A2(Opt.) X2, Z2, Cs2,
Min. input increment	0.001 mm, 0.0001 inch, 0.001 deg
Min. output increment	X axis: 0.0005 mm, X axis: Z0.001 mm
	Y axis: 0.001mm
Parts program strage capacity	Total 1MB (2,560mTape length)
Spindle function	Spindle speed S4-digits
	Constant cutting speed control (G96)
Rapid traverse rate	X1, X2, Z1 axis: 20m/ min
	Z2 axis: 20m/ min
	Y1 axis: 12m/ min
Cutting feed rate	F 3.4 digit per revolution
Cutting feed rate override	0-150% (in 10% increments)
Interpolation	G01, G02, G03
Threading	G32, G92
Canned cycle	G90, G92, G94
Work coordinate setting	Automatic setting, 64 work coordinate setting
	by the tool position
Tool selection	by TAABB at the specified position for each
	turret tool wearcompensation is selected by BB.
Direct input of tool position	by measured MDI
Input/ Output interface	USB, PC card slot
Automatic operation	1 cycle operation/continuous operation,
	single block block delete, machine lock, dry run,
	feed hold, optional block skip

NC standard functions

10.4"color LCD, No of resistered programs: 800, decimal point input
Manual pulse generator, memory protect, polar coordinate interpolation
Programable data input (G10), C-axis control (SP1/SP2), superimposed control A
Chamfering/ corner R, Tool nose R compensation, background editing
Synchronous mixed control, operating time/ parts no. display
Multiple repetitive canned cycle (G70-G76), continuous threading
Canned cycle for drilling, tool life management system, variable-lead cutting
Rigid tap function (spindle & revolving tool), circular interpolation, custom macro
Handle retrace function, polygon cutting, synchronized function,
Dual check safety
Reference position setting
NC option
Helical interpolation, RS-232C.

CITIZEN

CITIZEN MACHINERY CO., LTD.

Japan	Citizen Machinery Co Ltd 4017-6 Miyota, Miyota-machi, Kitasaku-gun, Nagano-ken, 389-0206, Japan	Tel: 81-267-32-5901	Fax: 81-267-32-5908
Europe - Germany	Citizen Machinery Europe GmbH Mettinger Strasse 11, D-73728 Esslingen, Germany	Tel: 49-711-3906-100	Fax: 49-711-3906-106
Europe - UK	Citizen Machinery UK Ltd 1 Park Avenue, Bushey, WD23 2DA, UK	Tel: 44-1923-691500	Fax: 44-1923-691599

www.citizenmachinery.co.uk

All specifications are subject to change without prior notice. This product is an export control item subject to the foreign exchange and foreign trade act. Thus, before exporting this product, or taking it overseas, contact your CITIZEN machine dealer. Please inform your CITIZEN machine dealer in advance of your intention to re-sell, export or relocate this product. For the avoidance of doubt products includes whole or part, replica or copy, technologies and software. In the event of export, proof of approval to export by government or regulatory authority must be evidenced to CITIZEN. You can operate the machines after the confirmation of CITIZEN. CITIZEN is a registered trademark of Citizen Holdings Co., Japan.